



深圳市科源信科技有限公司  
Shenzhen KeYuanXin Technology CO.,LTD

# 产品规格书

**SPECIFICATION FOR APPROVAL**

深圳市福田区振华路 118 号华丽装饰一栋西座 306A  
306A Block West Building 1, Huali Decoration  
NO.118 Zhenhua Road Futian District Shenzhen  
电话 TEL: 4008-735-535 传真 FAX: 0755-23616323



Product Name: Crystal  
\_\_\_\_\_

Product Type: SMD 5032G  
\_\_\_\_\_

Nominal Freq: 11.0592MHz  
\_\_\_\_\_

ProvideBrand: KKST  
\_\_\_\_\_

P/N: KAW11059H03R  
\_\_\_\_\_

Customer P/N:  
\_\_\_\_\_

**Approved By Customer**

**Signature:** \_\_\_\_\_ **Date:** \_\_\_\_\_



## **CONTENT**

- NO.1 Product specification and features**
- NO.2 Product outline dimension**
- NO.3 Product reliability**
- NO.4 Package specification**




## N0.1 Product specification and features


| <b>1.1 General characteristics</b>  |                              |
|-------------------------------------|------------------------------|
| Nominal frequency                   | 11.059200 MHz                |
| Overtone order                      | Fundamental                  |
| Type                                | SMD5032G                     |
| Operating temperature               | -20~70 °C                    |
| Storage temperature                 | -40~85 °C                    |
| <b>1.2 Electric characteristics</b> |                              |
| Adjustment tolerance: (at+25°C)     | ±20 ppm                      |
| Tolerance over the temperature:     | ±20 ppm                      |
| Load capacitance                    | 20.0 pF                      |
| Drive level                         | 10.0 μW                      |
| Equivalent resistance               | 60.0 Ω Max                   |
| Insulation resistance               | 500 MΩ Min      100VDC±15VDC |
| Aging                               | ±3ppm/Year                   |
| <b>1.3 Other characteristics</b>    |                              |
| SPDB                                | <-3 dB                       |

## NO.2 Outline dimensions、Appearances



### 2.1 Product outline dimension(mm)

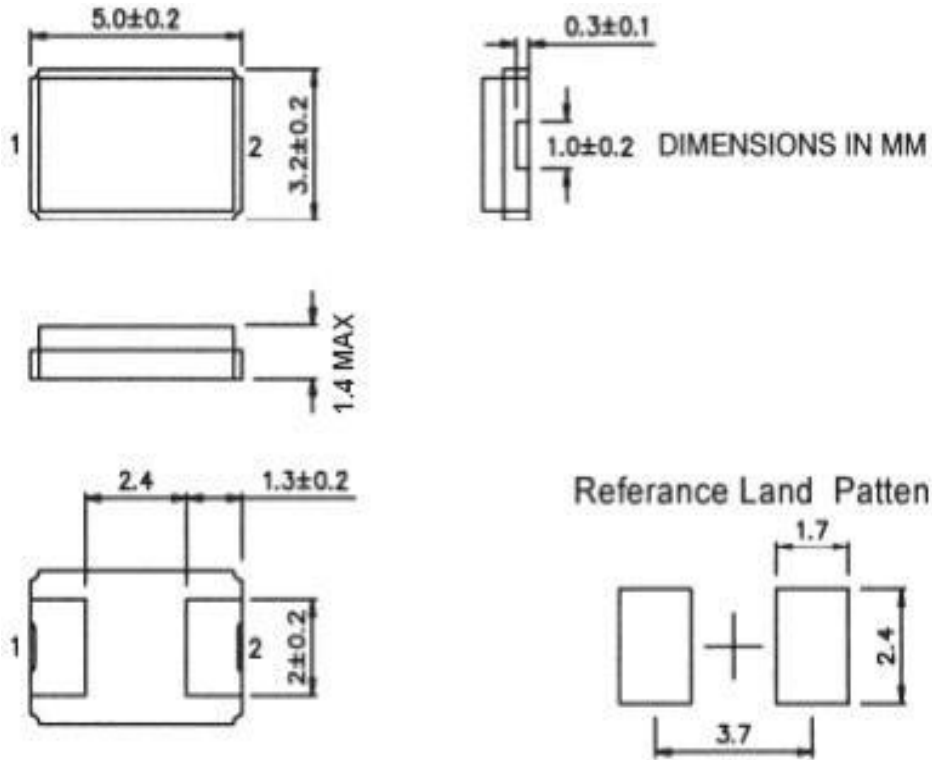


2.2 Carrier Dimensional Drawing (mm)

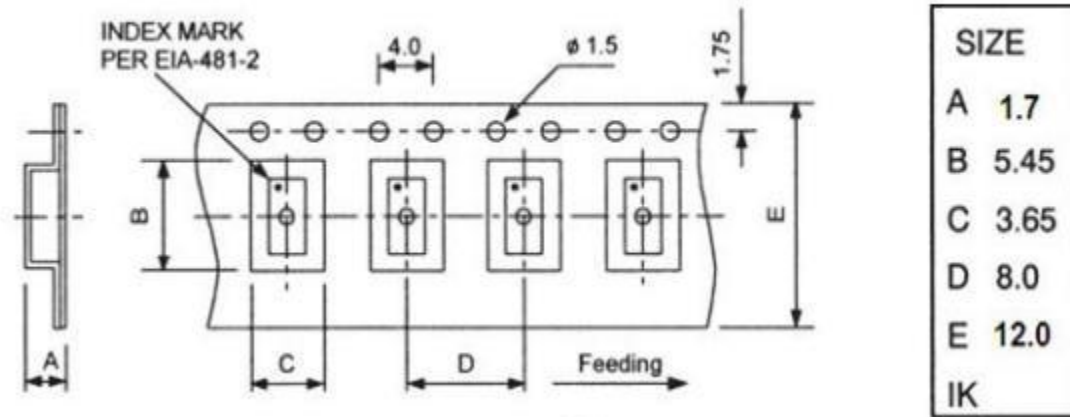

2.3 Reel Dimensional Drawing (mm)

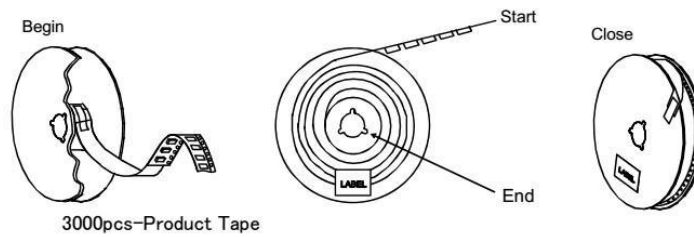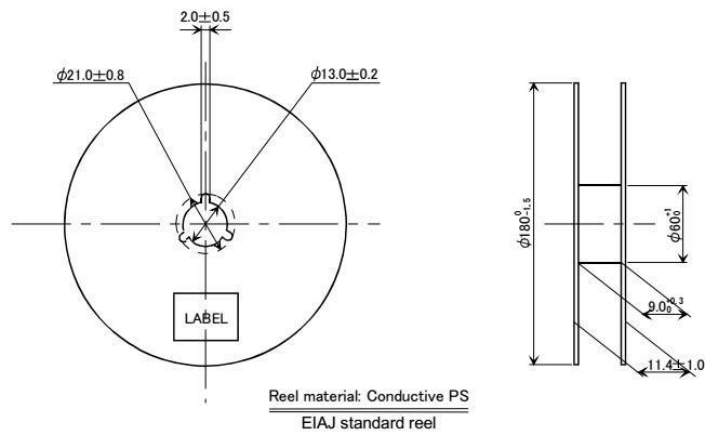

### NO.3 Product reliability
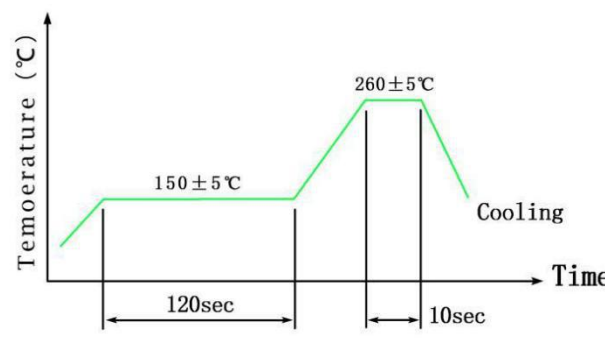
| Item | Condition   | Result |
|------|---|--------|
| A1   | <b>Cold resistance</b><br>Stored at $-40\pm 2^{\circ}\text{C}$ for $1000\pm 2$ hrs then $25\pm 2^{\circ}\text{C}$ 1~2 hrs before testing  | (I)    |
| A2   | <b>Heat resistance</b><br>Stored at $85\pm 2^{\circ}\text{C}$ for $1000\pm 2$ hrs then $25\pm 2^{\circ}\text{C}$ 1~2 hrs before testing   | (I)    |
| A3   | <b>Salt Mist Test</b><br>Spray the $35^{\circ}\text{C}\pm 2^{\circ}\text{C}$ salt water (salt density 5%) to crystal for $48\pm 2$ hrs,then clean by water  | (I)    |
| A4   | <b>Humidity Resistance Result</b><br>Steady temperature: $60\pm 2^{\circ}\text{C}$ ;humidity: 90 ~ 95 % RH;<br>time:500h  | (I)    |
| A5   | <b>Mechanical Shock</b><br>$14700\text{m/S}^2$ 0.5sec 5times in each of 6 direction   | (I)    |
| A6   | <b>Aging</b><br>Stored at $85\pm 3^{\circ}\text{C}$ for $720\pm 12$ Hrs then $25\pm 2^{\circ}\text{C}$ 1~2 Hrs before testing Stored at $25\pm 2^{\circ}\text{C}$ for $1\pm 0.03$ year  | (I)    |
| A7   | <b>Leakage</b><br>Fine leak: Helium leak test *JIS C 6701 10.6  | (V)    |
| A8   | <p><b>Temperature Cycle</b><br/><math>-40^{\circ}\text{C} \sim 85^{\circ}\text{C}</math>, Dewell 30Min, 100 cycles</p>  <p>The graph shows a temperature cycle with two stages. The first stage is a dwell at <math>150\pm 5^{\circ}\text{C}</math> for 120 seconds. The second stage is a dwell at <math>260\pm 5^{\circ}\text{C}</math> for 10 seconds, followed by a cooling phase. The y-axis is labeled 'Temperature (°C)' and the x-axis is labeled 'Time'.</p> | (I)    |

3.1 Mechanism characteristics

|                   |  |             |
|-------------------|--|-------------|
| <p><b>B.1</b></p> | <p><b>Drop Test</b><br/>Device are dropped from a height of 100 cm onto 20mm thickness stainless plate executing 3 times of random drops</p>   | <p>(I)</p>  |
| <p><b>B.2</b></p> | <p><b>Resistance of Vibration</b><br/>Frequency: 10~55Hz, amplitude(total excursion): 1.5mm±15%,3 direction (X,Y,Z) each 2 hr</p>  | <p>(I)</p>  |
| <p><b>B.3</b></p> | <p><b>Resistance to soldering heat (Hand soldering method)</b><br/>Temperature: 370~400°C; Time: 3~4sec;<br/>Frequency: 2 times; Soldering iron: 60W/Min</p>   | <p>(I)</p>  |
| <p><b>B.4</b></p> | <p><b>Solderability</b><br/>240±2°C, 3±0.5sec</p>  | <p>(II)</p> |
| <p><b>B.5</b></p> | <p><b>Reflow) Resistance to soldering heat (Reflow)</b><br/>260± 5°C; 10S; 2Times</p> <p style="text-align: center;">Reflow</p> <p>The graph shows a temperature profile for reflow soldering. The y-axis is labeled 'TEMP. (°C)' and ranges from 50 to 300. The x-axis is labeled 'TIME (sec)'. The profile starts at 50°C, rises to 180°C, and then to a peak of 260°C. Key parameters are: 90-120S for the pre-heat phase, 10s MAX for the peak temperature, and 40S for the cooling phase. The peak temperature is 260±5°C, and the cooling phase ends at 180±10°C. A pink arrow points to the pre-heat phase.</p> | <p>(I)</p>  |






| Item | Result NO. | Specification Requirements  |
|------|------------|---|
| 1    | ( I )      | Frequency variation $< \pm 10 \text{ppm}$<br>Resistance variation $< 5 \Omega$ or 15% of RR spec.,<br>select the bigger value     |
| 2    | ( II )     | The covering rate of Tin-plating is more than 95%   |
| 3    | ( III )    | There is no bubbles after the Crystal is dipped in the water<br>Insulation Resistance: 500 M $\Omega$ Min<br>100VDC/ $\pm 15$ VDC |
| 4    | ( IV )     | The Crystal is no crackle under the observation of 10<br>times Magnifier.   |
| 5    | ( V )      | $1 \cdot 10^{-9} \text{Pa} \cdot \text{m}^3/\text{s}$ Max   |

## NO.4 Package specification


### 4.1 Marking



### 4.2 Label

| KKST KEYUANXIN TECHNOLOGY GO.,LTD |              |                     |
|-----------------------------------|--------------|---------------------|
| Item                              | Crystal      | QTY:<br>1000PCS     |
| P/N                               | KAW11059H03R |                     |
| FREQUENCY                         | 11.0592MHz   | DATE:<br>2018-03-12 |
|                                   |              |                     |

### 4.3 Package specification

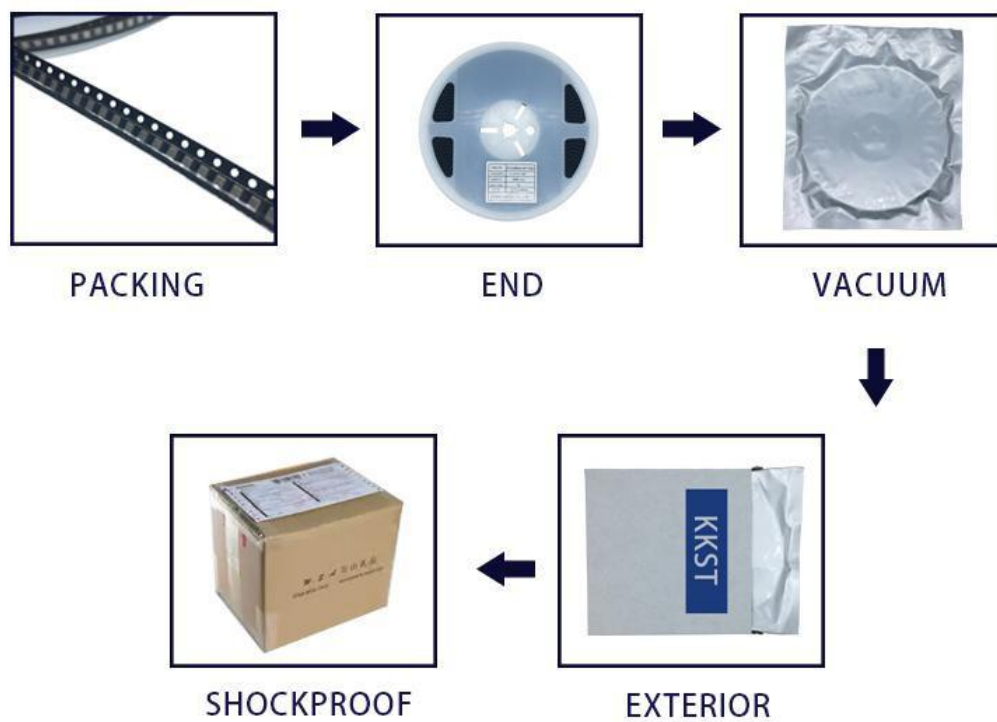



KEYUANXIN TECHNOLOGY GO.,LTD

浏览网址：[www.szkyx.cn](http://www.szkyx.cn)